


Specification: **BS-2022**

- * Screw mount or self adhesive
- * Center leads with #22AWG 18" length
- * Special leads on request
- * Spacer, Cover or Tape available on request
- * Switches or magnets available seperately
- * Resistor, Diode and Supervisory Loop available on request
- * Colors: White, Brown, Grey

... Surface Mounted



Dimension (mm):

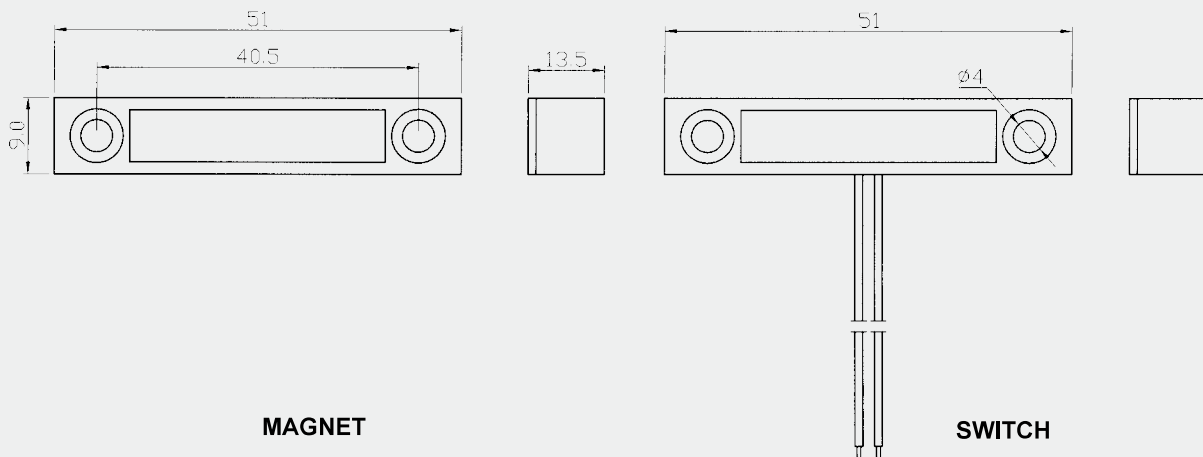

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)] (Ohm)	Depature Gap [Inch(mm)] (W)	Maximum Initial Contact Resistance (VDC/VAC)	Maximum Contact Rating (A)	Maximum Switching Voltage	Maximum Switching Current
BS-2022	Closed	N/O	1.18 (30)	1.3 (33)	0.150	10	100	0.5
BS-2022WG	Closed	N/O	1.45 (37)	1.53 (39)	0.150	10	100	0.5
BS-2022A	Open	N/C	1 ¹ / ₈ (28)		0.150	3	30	0.2
BS-2022C	Closed & Open	SPDT	1 ¹ / ₈ (28)		0.150	3	30	0.2

