





- Stick surface mount
- Super special adhesive
- Standard 18" #22AWG leads
- Speical leads available
- Resistor, Diode and Supervisory Loop available on request
- Colors: White, Brown, Grey

## Dimension (mm):

## ••• Surface Mounted



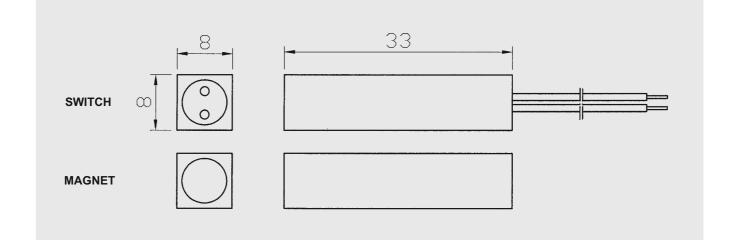

## Order Information:

	Part Number	Lоор Туре	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
c UL us 🤇	BS-2051	Closed	N/0	1(25)	1.07 (27)	0.150	10	100	0.5
	BS-2051A	Open	N/C	<sup>3</sup> / <sub>4</sub> (20)		0.150	3	30	0.2
	BS-2051C	Closed & Open	SPDT	<sup>3</sup> / <sub>4</sub> (20)		0.150	3	30	0.2